

Product Lines

TK Series Low Pressure Cartridge Filter Housing

Design P.	10kg/cm ²	Operating P.	7kg/cm ²
-----------	----------------------	--------------	---------------------


Design T.	100°C	Operating T.	75°C
-----------	-------	--------------	------

Accessory	Cartridges
-----------	------------



Low Pressure Cartridge Filter Housing

No.	Description	No.	Description	No.	Description
1	Clamp	8	Port outlet	15	Cartridge post
2	Vent	9	Drain	16	Center post
3	Top cover	10	Bottom cover	17	Pedestal
4	O-ring	11	Support leg	18	Nut
5	Shell flange	12	Nut	19	Cartridge support plate
6	Shell	13	Pressure plate		
7	Port inlet	14	Springs		

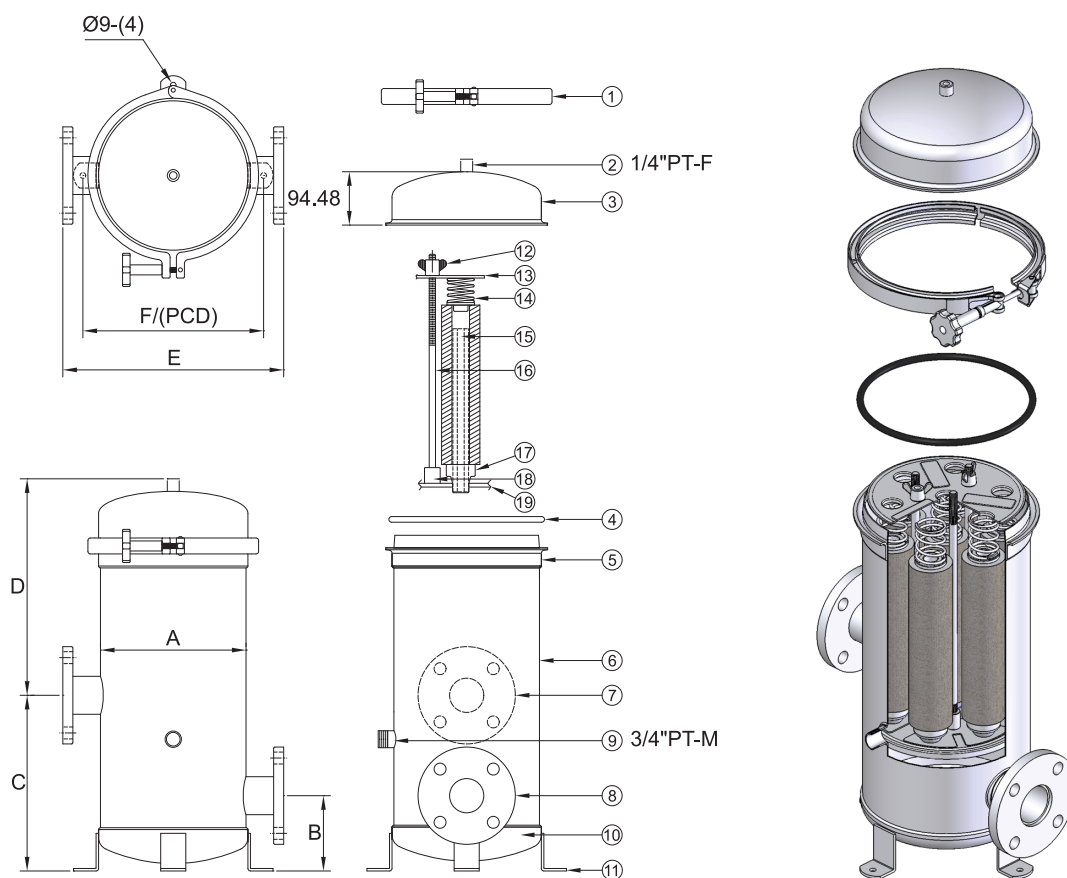

Model	Length of Cartridge	A m/m	B m/m	C m/m	D m/m	E m/m	F/PCD m/m	M ³ /Hr	GPM	Weight	Volume
TK3~4	10"	Ø180	120	280	340	300	Ø236	3~4	15~20	15kg	14L
TK3~4	20"	Ø180	120	280	605	300	Ø236	6~8	30~40	18kg	21L
TK3~4	30"	Ø180	120	280	860	300	Ø236	9~12	45~60	20kg	28L
TK5~7	10"	Ø232	120	280	340	352	Ø288	5~7	25~35	21kg	23L
TK5~7	20"	Ø232	120	280	605	352	Ø288	10~14	50~70	25kg	34L
TK5~7	30"	Ø232	120	280	860	352	Ø288	15~21	75~105	28kg	45L
TK5~7	40"	Ø232	120	280	1115	352	Ø288	20~28	100~140	31kg	55L