

Product Lines

TL Series Multi-Cartridges Filter Housing

Design P.	10kg/cm ²	Operating P.	7kg/cm ²
-----------	----------------------	--------------	---------------------

Design T.	100°C	Operating T.	75°C
-----------	-------	--------------	------


Accessory	Cartridges. Partition Plate
-----------	-----------------------------

Available for customize filter housing, such as fit for high temperature, high pressure and jacket type.



Multi-Cartridges Filter Housing

No.	Description	No.	Description	No.	Description
1	Screw	11	Spindle	21	Pedestal
2	Turntable	12	Eye bolt	22	Bottom cover
3	Hanger	13	Washer	23	Support Leg
4	Vent	14	Eye nut	24	Drain
5	Top cover	15	Shell	25	Nut
6	Top cover flange	16	Port inlet	26	Pressure plate
7	Eye nut socket	17	Port outlet	27	Springs
8	O-ring	18	Drain	28	Center post
9	Shell Flange	19	Nut	29	Cartridge post
10	Eye bolt socket	20	Cartridge support plate		

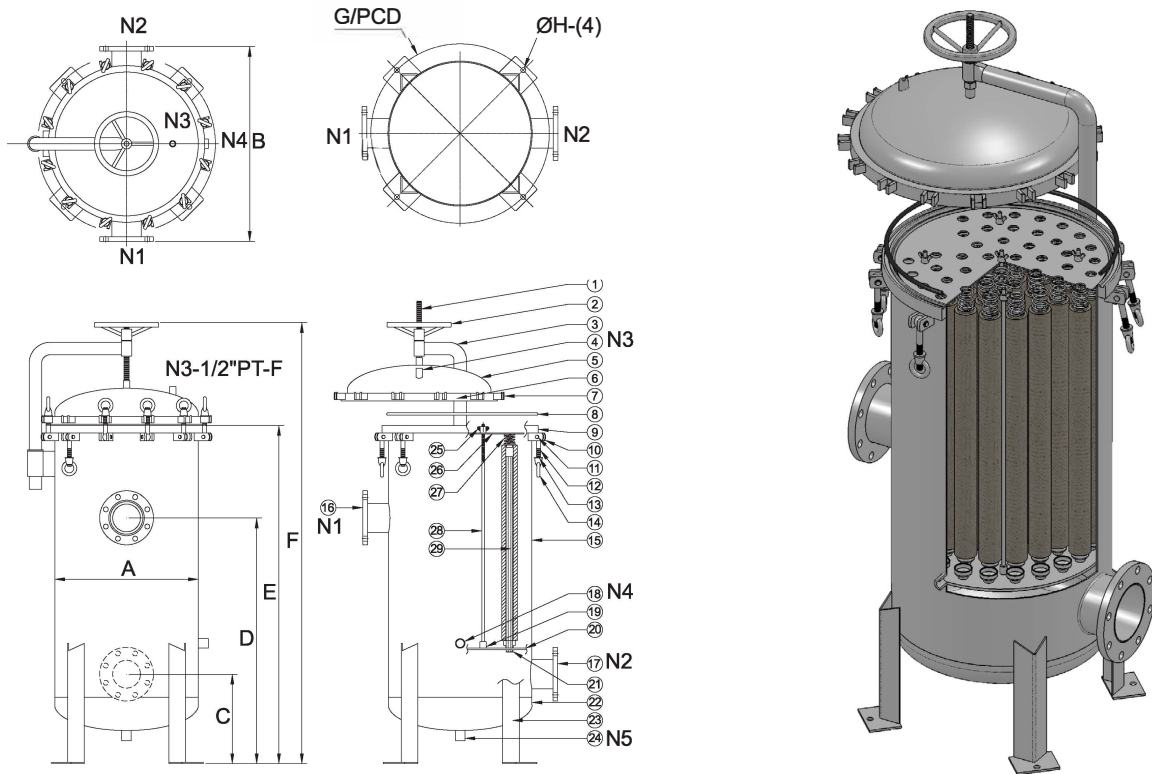

Model	Length of Cartridge	N1/N2	N4/N5	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G/PCD m/m	H m/m	M ³ /Hr	GPM	Weight	Volume
8~12	30"	2"~4"F	1"PT-F	Ø306	506	350	700	1320	1638	Ø416	Ø14	24~36	120~180	77kg	89L
	40"	2"~4"F	1"PT-F	Ø306	506	350	700	1570	1888	Ø416	Ø14	32~48	160~240	85kg	107L
13~20	30"	2"~4"F	1"PT-F	Ø406	606	350	700	1320	1694	Ø516	Ø14	39~60	195~300	105kg	165L
	40"	2"~4"F	1"PT-F	Ø406	606	350	700	1570	1944	Ø516	Ø14	52~80	260~400	125kg	198L
21~28	30"	3"~4"F	1"PT-F	Ø486	686	350	700	1320	1709	Ø596	Ø14	63~84	315~420	120kg	239L
	40"	3"~4"F	1"PT-F	Ø486	686	350	700	1570	1959	Ø596	Ø14	84~112	420~560	145kg	286L
29~40	30"	3"~4"F	1"PT-F	Ø560	760	350	700	1320	1726	Ø704	Ø18	87~108	435~540	190kg	327L
	40"	3"~4"F	1"PT-F	Ø560	760	350	700	1570	1976	Ø704	Ø18	116~138	580~720	225kg	389L
41~52	30"	4"~6"F	1"PT-F	Ø600	800	400	800	1400	1822	Ø744	Ø18	111~138	555~690	200kg	401L
	40"	4"~6"F	1"PT-F	Ø600	800	400	800	1650	2072	Ø744	Ø18	148~184	740~920	230kg	460L
53~57	30"	4"~6"F	1"PT-F	Ø650	850	450	850	1450	1880	Ø794	Ø18	141~168	705~840	242kg	484L
	40"	4"~6"F	1"PT-F	Ø650	850	450	850	1700	2130	Ø794	Ø18	188~224	940~1120	280kg	567L
58~82	30"	4"~6"F	11/2"PT-F	Ø762	962	500	950	1500	2080	Ø962	Ø19	171~243	855~1215	365kg	665L
	40"	4"~6"F	11/2"PT-F	Ø762	962	500	950	1750	2330	Ø962	Ø19	228~324	1140~1620	408kg	802L
83~117	30"	6"~8"F	2"PT-F	Ø900	1100	550	1000	1620	2233	Ø1100	Ø19	246~285	1230~1425	687kg	1042L
	40"	6"~8"F	2"PT-F	Ø900	1100	550	1000	1870	2483	Ø1100	Ø19	328~380	1640~1900	715kg	1201L
118~146	30"	6"~8"F	2"PT-F	Ø1000	1200	600	1100	1670	2307	Ø910	Ø22	288~405	1440~2025	791kg	1350L
	40"	6"~8"F	2"PT-F	Ø1000	1200	600	1100	1920	2557	Ø910	Ø22	384~540	1920~2700	832kg	1546L
147~218	30"	10"~12"F	2"PT-F	Ø1100	1300	650	1250	1780	2442	Ø1010	Ø22	408~465	2040~2325	1046kg	1580L
	40"	10"~12"F	2"PT-F	Ø1100	1300	650	1250	2030	2692	Ø1010	Ø22	544~620	2720~3100	1102kg	1817L
219~263	30"	10"~12"F	2"PT-F	Ø1220	1400	650	1250	1780	2465	Ø1130	Ø22	468~692	2340~2595	1188kg	1955L
	40"	10"~12"F	2"PT-F	Ø1220	1400	650	1250	2030	2715	Ø1130	Ø22	624~692	3120~3460	1247kg	2238L